



# WMI INDUSTRIES, LTD.

January 15, 1993

Ron Safford  
STATE OF FLORIDA DEPT. OF AGRICULTURE  
Bureau of Fairs  
3125 Conner Blvd.  
Bldg. 4  
Tallahassee, FL 32399-1650

Fax: 904-488-9023

RE: Window cutout or Camera on GRAVITRON door.

Dear Mr. Safford:

I just received a call from one of your inspectors about the cutout window in the GRAVITRON door. The ride specifically mentioned is owned by FARROW AMUSEMENTS. It is mandatory for either the camera to be installed and operating or the window cut in the door.

It is acceptable for FARROW AMUSEMENTS to operate their GRAVITRON as long as ALL operators are instructed to not open the door more than 5" while the ride is moving. This will allow the operator to see the location of the stairs without creating a hazard for the passengers.



The window or camera system must be installed by January 29, 1993.

Enclosed is a copy of the cut out and the recommended location for the hole.

If you have any questions please feel free to give Jerry or me a call.

Sincerely,

Victor Wisdom

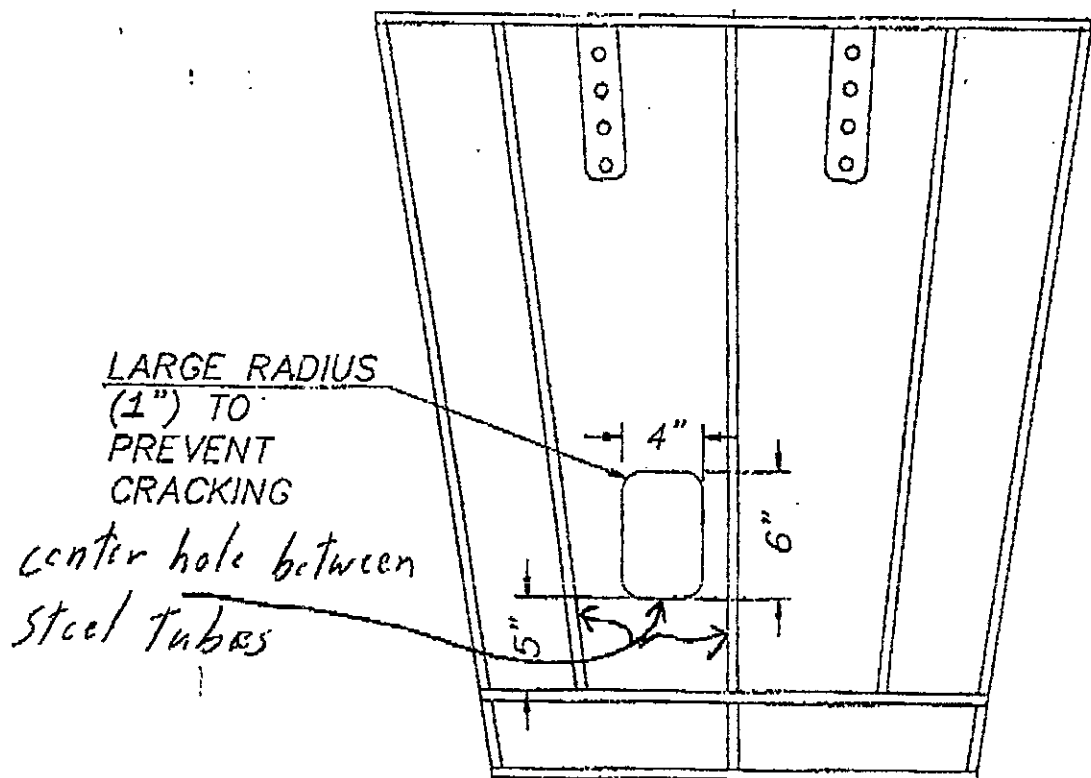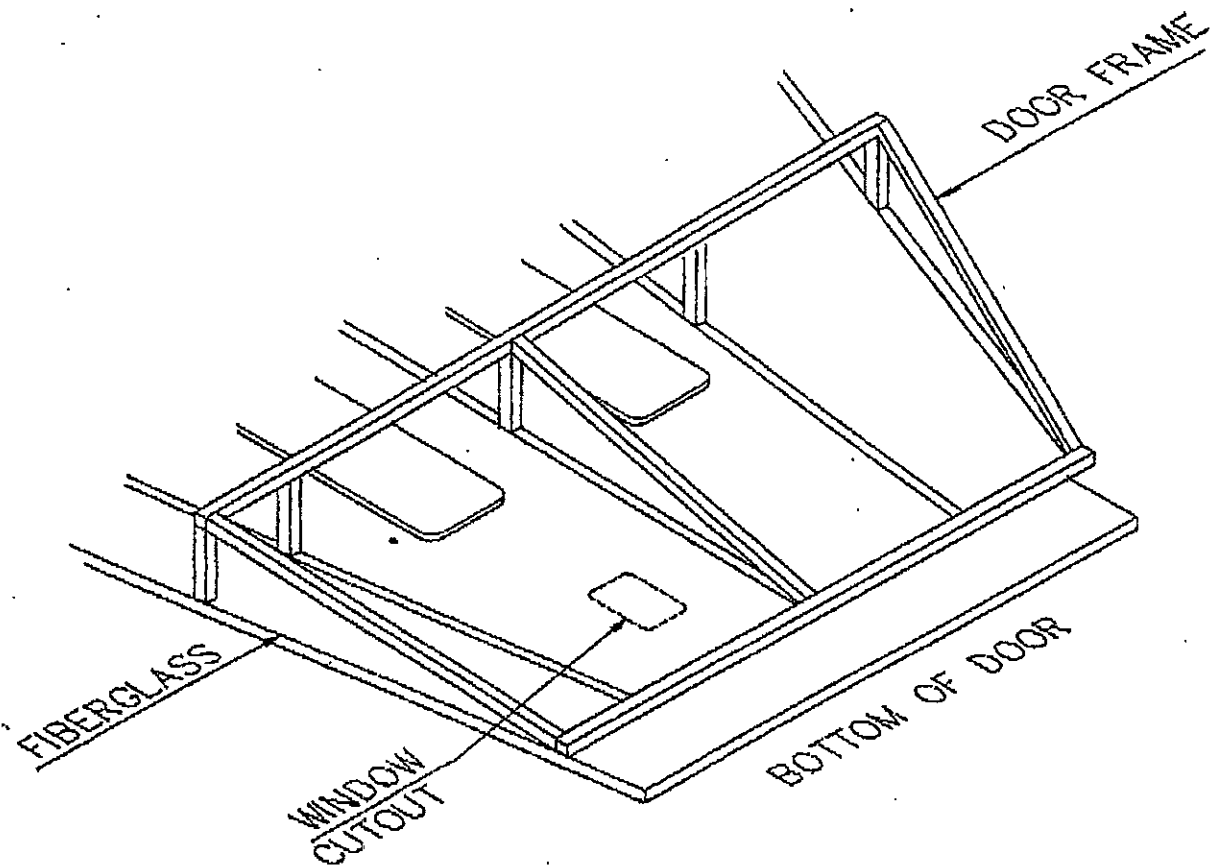



Merino, CO 80741

THIS DRAWING IS A TEMPLATE OF THE CUT-OUT AREA FOR THE PANEL WINDOW. CUT-OUT AROUND THE EDGE, AND TRACE AROUND THE OUTSIDE WITH A HEAVY BLACK MARKER TO MARK THE AREA TO BE REMOVED ON THE PANEL. THE WINDOW CAN BE MADE FROM A PIECE OF CLEAR LEXAN MEASURING 8 x 6 AND SHOULD BE ATTACHED ON THE INSIDE OF THE PANEL BY MEANS OF BOLTS, SCREWS, OR POP-RIVOTS (FROM THE OUTSIDE - IN).

