

Number: B03-0349-00

Date: Oct. 25, 1989

Supersedes:

America's Largest Manufacturer of Amusement Rides

SERVICE BULLETIN

Effective Serial Numbers: All Units

Ride: SKY DIVER / ASTRO WHEEL

Subject:Floor Retainer Pins

Recent field inspections have found SKY DIVER and ASTRO WHEEL amusement rides with platforms improperly installed. The platforms must be properly secured to maintain the safety of the ride and avoid personal injury.

CHANCE MANUFACTURING CO., INC. requires that the owners of SKY DIVER and ASTRO WHEEL amusement rides inspect the platform retainer pins using the instructions on the reverse side of this bulletin. Return the Certification Of Compliance within 15 days from receipt of this bulletin.

The inspection must be performed by qualified personnel, capable of understanding the function of the parts and their proper installation. If there are any questions regarding this inspection or these instructions, contact the CHANCE CUSTOMER SERVICE DEPARTMENT immediately.


NOTICE


USE ONLY THOSE COMPONENTS AUTHORIZED, SPECIFIED OR PROVIDED BY THE MANUFACTURER. IF ANY ALTERATIONS AND/OR MODIFICATIONS OR ADDITIONS AND INSTALLATION OF UNAUTHORIZED COMPONENTS ARE MADE TO THE ORIGINAL DESIGN WITHOUT THE MANUFACTURER'S EXPLICIT WRITTEN CONSENT OR WITHOUT DIRECT SUPERVISION BY A MANUFACTURER'S REPRESENTATIVE, CHANCE MANUFACTURING CO., INC. MAKES NO CLAIMS AS TO THE INTEGRITY OF THE ALTERED OR MODIFIED RIDE.

INSPECTION PROCEDURE

Inspect for proper installation of platforms and retainer pins as shown in the following illustrations. Each platform must be attached to the adjoining platforms with the taper pins and hair pins as originally provided from the factory. Never allow the platforms to simply lie in place. Likewise, do not use fasteners other than the pins originally specified.

THIS INSPECTION MUST BE PERFORMED AT EVERY SET-UP OR MONTHLY, WHICHEVER OCCURS FIRST.

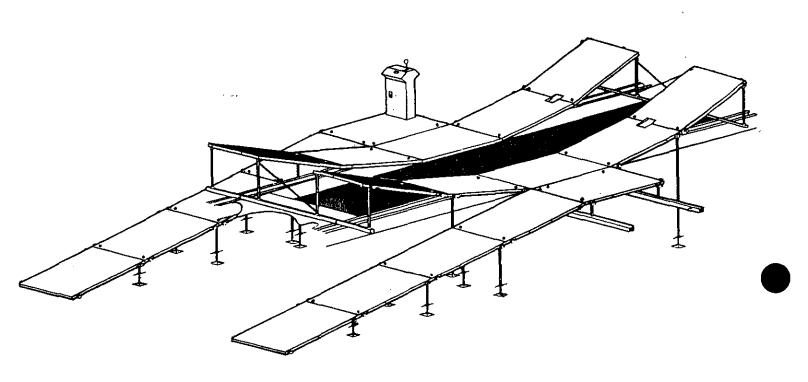

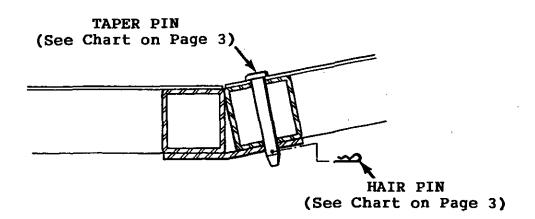

DETAIL OF TYPICAL PLATFORM WITH TAPER PIN AND HAIR PIN CORRECTLY INSTALLED

FOR RIDES WITH EXTRUDED ALUMINUM FLOORING USE THE FOLLOWING PARTS

FOR RIDES WITH
ALUMINUM TREADPLATE FLOORING
USE THE FOLLOWING PARTS

TAPER PIN

3/8 x 2-1/16 Grip Length
(Part No. 390-5228400)
&

HAIR PIN - 3/32
(Part No. 694-5189900)

TAPER PIN

3/8 x 3-1/8 Grip Length
(Part No. 390-5228500)
&

HAIR PIN - 3/32
(Part No. 694-5189900)

NOTE: IF HOLES HAVE WORN TO A DIMENSION OF 7/16" OR GREATER AT ANY POINT, DRILL OVERSIZE TO 17/32" AND USE THE TAPER PINS AND HAIR PINS SHOWN IN THE FOLLOWING CHART:

FOR RIDES WITH
EXTRUDED ALUMINUM FLOORING
USE THE FOLLOWING PARTS

FOR RIDES WITH
ALUMINUM TREADPLATE FLOORING
USE THE FOLLOWING PARTS

TAPER PIN

1/2 x 2-1/2 Grip Length
(Part No. 390-5228800)
&
HAIR PIN - 1/8
(Part No. 694-5190000)

TAPER PIN

1/2 x 2-11/16 Grip Length
(Part No. 390-5228900)
&
HAIR PIN - 1/8
(Part No. 694-5190000)



Certification of Compliance

SERVICE BULLETIN B03-0349-00

We hereby certify the procedure outlined in the above-mentioned service bulletin has been performed on the SKY DIVER / ASTRO WHEEL			
_			, in accordance
with the instru	ctions and specifications supplied	by Chance Manufacturing Co	mpany, Inc.
	Date Bulletin Received Date Procedure Performed Name and Address of Person performing Procedure:		
Attested:			
		Maintenance Supervisor	
		Address	
City	State	City	State
Ву:			
Date:		Date:	
Results:			
			

This certification must be completed and returned to Chance Manufacturing Company, Inc. within fifteen (15) days of receipt of the bulletin