

SERVICE BULLETIN

DATE: FEBRUARY 25, 2004


RIDE: ADULT COASTER CARS


SUBJECT: WHEEL BOGGY BRACKETS

COMPLIANCE DATE: IMMEDIATE

- ❖ CRACKING HAS BEEN INDICATED ON 2 WHEEL BOGGY ASSEMBLIES ON ONE RIDE. INSPECT THE INDICATED AREA AND REPAIR IF NEEDED. FAILURE OF THE BOGGY IN THIS AREA MAY CAUSE INJURY.
- Inspect the area indicated on the attached drawing.
- Inspect both inner main boggy plates.
- 3. Use visual and dye penetrant or magnetic flux
- 4. If a crack is found, V out the crack and weld with 7018 rod.
- Add 1/4" doubler plate and weld the perimeter of the doubler plate with 7018 rod.
- 6. Check adjustment of wheels.
 - NOTE: Adjusting side and bottom wheels in the station may be causing the cracking. Adjust wheels on curve only.

Contact Wisdom Industries for Repair instructions or doubler plates.



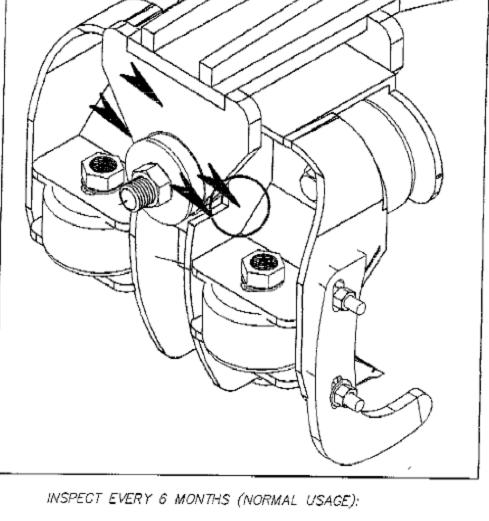

- 1. REMOVE LOOSE PAINT AND GREASE THAT WOULD OBSTRUCT VIEW.
- 2. INSPECT FOR CRACKS ON THE WHEEL BRACKET ASSEMBLY IN THE AREA INDICATED (2 PLACES EACH BOGGY) AND THE AXLE ASSEMBLY.
- 3. PAINT BARE METAL AND GREASE AS REQUIRED.
- REPAIR ACCORDING TO INSTRUCTION AS NEEDED.

INDUSTRIES Merino, CO 80741	APPROVED BY:	
INSPECTION OF WHEEL BRACKET AS	SEMBLY	SCALE: QUARTER DATE: 02/24/04
COASTERS/CHINA/DRAGON	DRAWN BY: JJR	DRAWING NUMBER: 9C 025

FEB 25, 2004 - 09: 44:10 < L. \CHINA\9002501.DH5 >